




**KLEIN**  
MARINE SYSTEMS

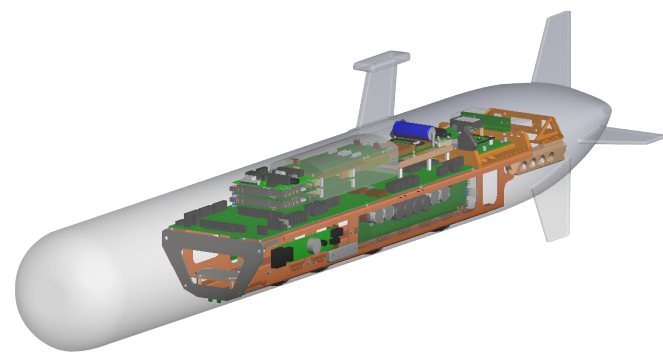

## KLEIN UUV-3500

### High-Resolution Side Scan Sonar for Unmanned Underwater Vehicles (Uuv's)

For over 50 years, Klein has “set the bar” for commercial side scan sonar performance. The newly developed UUV-3500 product line leverages a powerful, wholly FPGA-implemented, multi-channel processing engine. The sonar engine simultaneously optimizes two different and concurrent output data streams for:

- Photo-quality side scan imagery
- High-accuracy, co-registered swath bathymetry

### Key Features

- Superior low-frequency resolution
- Unsurpassed high-frequency range performance
- True dual-frequency operation to maximize along track resolution
- On-board processing allows for direct integration with CAD/CAC systems
- Low-power, compact and lightweight
- Easily integrates into all man-portable UUV's
- Side Scan and Bathymetry for Autonomous Underwater Vehicles (AUV's), Remotely Operated Vehicles (ROV's) and UUV's
- Excellent cost-to-performance value

#### Applications:

- Hydrographic/Geophysical survey
- Cable/Pipeline survey
- Environmental survey
- Small object detection
- Mine Countermeasures (MCM)/Intelligence, Surveillance, and Reconnaissance (ISR) surveys

The UUV-3500 operates exclusively with Klein's proprietary wide-band technology providing unmatched side scan range and resolution performance in a low-power, compact and lightweight payload. The swath bathymetry option allows for wide swath performance which is typically 10 to 12 times the overall altitude of the UUV and thereby significantly greater coverage than can be achieved by a multi-beam echo-sounder.

The system electronics will easily integrate into all small UUV platforms currently on the market and is also available in a watertight pressure case configuration. Klein's newly designed, ruggedized transducers are built to last and perform in the most demanding environmental conditions.

Post-survey analysis of the data can be accomplished using Klein's SonarPro® software. Alternately, we offer a Software Development Kit (SDK) which allows UUV manufacturers and third party software developers the ability to control the sonar directly, as well as display data using our proprietary image display engine.



UUV-3500 General Specifications	
Total Electronics Volume	3"L x 4"H x 15"D (Note 1) (76.2 x 101.6 x 381 mm) 1.8 lb / 1.0 lb (0.82 kg / 0.45 kg) dry/wet
Transducers	22"L x 1.75"H x 1"D (Note 1) (559 x 44.45 x 25.4 mm)
Transducer Weight	1.8 lb / 1.0 lb (0.82 kg / 0.45 kg) dry/wet
Transducers With Bathy	22.75"L x 3.89"H x 1.14"D (Note 1) (577.85 x 98.8 x 28.95 mm)
Transducer Weight (Bathy)	7.5 lb / 4.0 lb (3.40 kg / 1.81 kg) dry/wet
Power	24 VDC (nominal), 18-30 W RMS, including optional bathymetry
Depth Rating	600 m standard (side scan only) 200 m with Bathymetry option (deeper depth rating options available)

Side Scan Specifications	
Frequencies	455 kHz, 900 kHz
Pulse Technology	Wide-band FM Chirp (1, 2, 4, 8 msec)
Across Track Resolution	2.4 cm
Beam Width	Horizontal: 0.34°, Vertical: 45°
Range (typical)	150 m @ 455 kHz 75 m @ 900 kHz
Side Scan Data Output	SDF


Swath Bathymetry Specifications	
Frequency	455 kHz
Along Track Resolution	0.48°
Across Track Sampling	4.8 cm
Pulse Technology	FM Chirp
Range	125 m nominal / side (typically 10 to 12 times altitude)
Bathymetric Data Outputs	SDF, GSF, & XYZ

Note 1: System electronics and transducers can be modified to support specific requirements of the UUV

Note 2: Transducers available in either a pigtail or penetrator cable configuration

This technical data and software is considered as Technology Software Publicly Available (TSPA) as defined in Export Administration Regulations (EAR) Part 734.7-11. Specifications subject to change without notice. SonarPro® is a registered trademark of Klein Marine Systems. Cleared for public release. Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice at Klein Marine Systems' discretion. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders. Rev 5/24

Klein Marine is deeply committed to customer support. We are currently servicing valued customers in 80 countries, and relying on a network of competent International Representatives to meet and exceed the service needs of our customers around the world. We provide 24 hour / 7 day a week support.

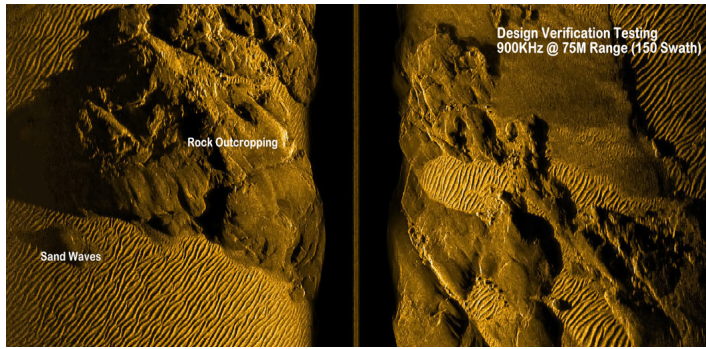

### Flexible System Architecture:

- System supports local data storage to solid-state hard disk or remote data logging to the UUV host over ethernet using network file system (NFS) protocol
- System supports UUV host via ethernet LAN or over a dedicated RS232 link
- Flexible configurations can support both wet and dry vehicle types
- System supports external triggering of its active acoustic devices which mitigates the impact of acoustic interference by allowing the UUV to coordinate acoustic emissions
- 1 PPS timing support

### Standard System:

- Sonar Electronics
  - Control data interface
  - Receiver
  - Transceiver
  - PC-104 CPU
  - Power filter
  - Receiver transition
- Port / Starboard
  - transducer (Note 2)
- SonarPro® software and documentation

### System Options:

- Pressure housing with end cap
- Bathymetry
- Solid-state hard drive
- Mounting bracket
- Transducer pressure test & certification

